
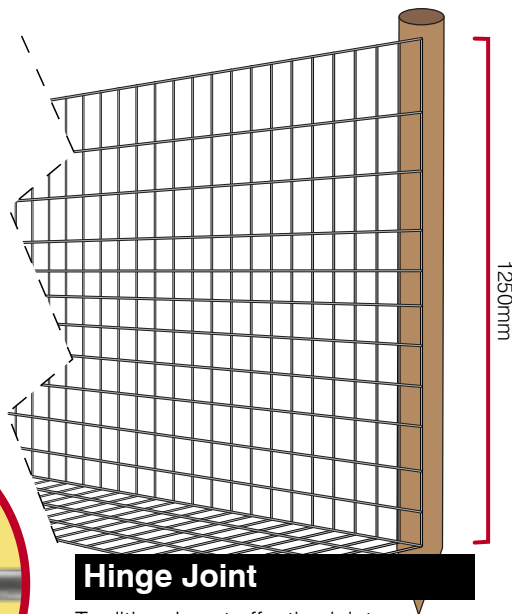


TORNADO®

LHT15/158/8 POULTRY FENCE

Top and Bottom wire 2mm high tensile
Intermediate line wire 2mm high tensile

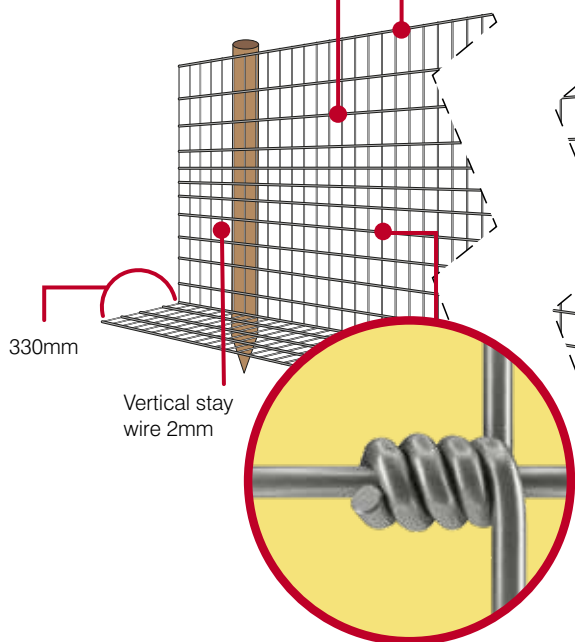

Hinge Joint

Traditional cost effective joint. Enables the netting to be turned out or cranked for use in special applications.

Description

LHT15/158/8 is a lightweight, high tensile poultry net with closely spaced vertical stay wires. Tornado LHT Poultry Fence is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. The spring like properties of a high tensile wire help the netting stay tight, keeping maintenance to a minimum.

Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. A single electrified wire can be used as an additional deterrent for fox exclusion, and the bottom of the net can be turned out. Zinc and zinc aluminium coated agricultural fence service life can be affected significantly when exposed to extremely acidic / alkaline or saline environments and this factor should be considered when designing your fence installation. For typical service life to be achieved it is recommended that the product must be installed in an atmosphere with corrosion class C1, C2 or C3 (very low/low/medium) in accordance with ISO 9223 and must not come into contact with substances that will accelerate corrosion, including but not limited to fertilisers, pesticides, herbicides, salt water and soils of pH lower than 5.5. Particularly at sites with peaty and wet

ground conditions it is recommended that you have the soil pH tested prior to designing your installation. For more information on installation please refer to BS1722 part 2

Suitable For

Poultry & Wild Fowl

Specification

Number of line wires	15
Overall height	158cm
Distance between stay wires	8cm
Top & bottom line wire specification	2mm diameter - 1100 - 1250 N/mm ²
Intermediate line wire specification	2mm diameter - 1100 - 1250 N/mm ²
Vertical stay wire specification	2mm diameter - 695 - 850 N/mm ²
Approx. weight per 50m roll	58kg
Material composition	Heavily galvanised steel wire

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

TORNADO®

Latest update: 01/12/21

sales@tornadowire.com

Tel: +44 (0) 1789 778 766



TORNADO®

LHT15/158/8 POULTRY FENCE

British & European Standards

- BSEN 10218** Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BSEN 10223** Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BSEN 10244** Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001** Tornado Wire Ltd operates a quality management system certified to this standard.

Sustainability

All Tornado products are 100% recyclable.

Traceability

This fence is batch marked and can be traced back to point of manufacture.


Health & Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Product Codes

30m roll*	HZLH151502
50m roll	HZLH151501
100m roll	HZLH151503

*Minimum order quantity may apply

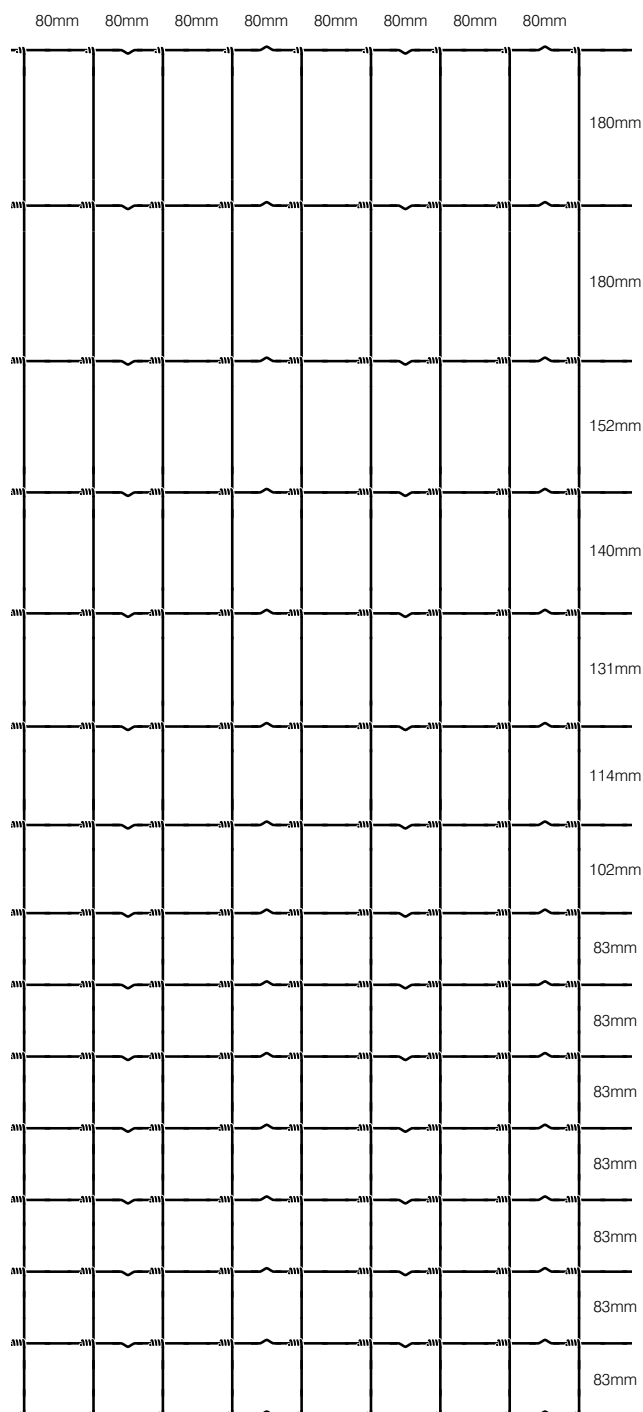

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 01789 778 766 | www.tornadowire.com | email: sales@tornadowire.com

TORNADO®
Latest update: 01/12/21

sales@tornadowire.com
Tel: +44 (0) 1789 778 766

